

CLAMP CONNECTION ClampCon® System


IN PLASTIC



FOR CHEMICAL, FOOD AND PHARMACEUTICAL TECHNOLOGY

Maximum hygiene and ideal protection against contamination or cross-contamination.

NO THREADS – **NO GERMS.**

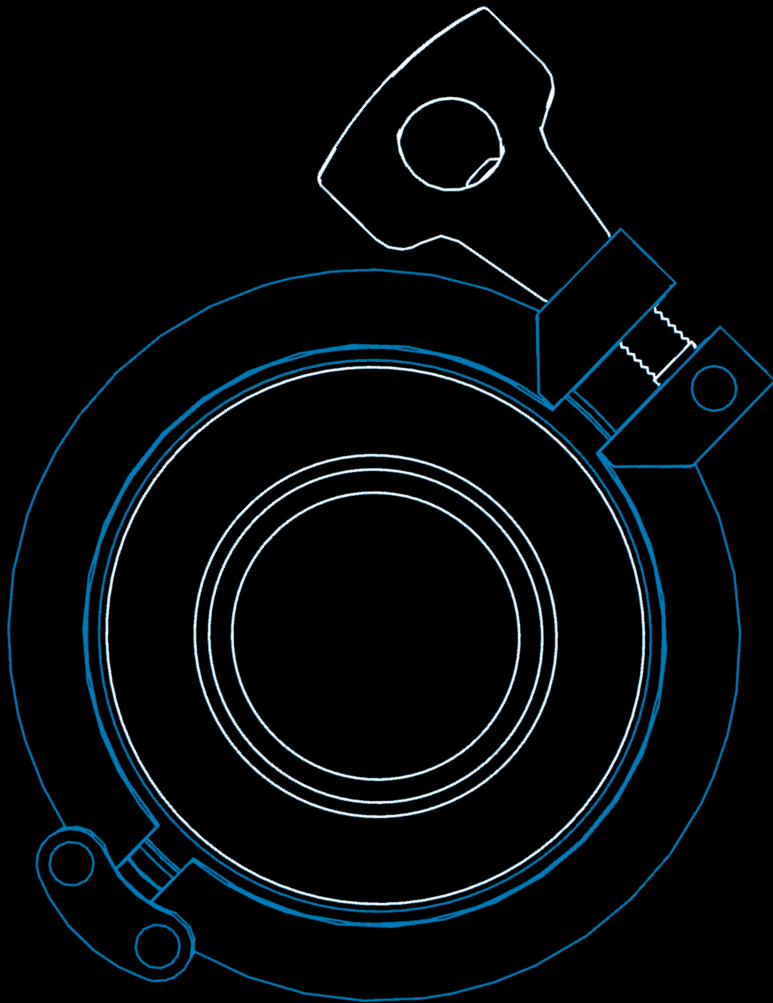

Our ClampCon® system (clamp connector) provides a solution for more safety, higher levels of hygiene and efficiency in chemical, food and pharmaceutical equipment:

The ClampCon® system consists of two spigots clamped together with a molded seal, allowing it to offer a minimal dead space connection with easy cleanability.

Our ClampCon® system is available in all standard materials and sizes. It includes various special components such as ClampCon® hose nozzles, ClampCon® strainer, ClampCon® IBC adapter and many more.

SAFETY,



SPIGOT

SPIGOT

GASKET

JOINT CLAMP

HYGIENE & EFFICIENCY

PP / PP NATURAL FDA / PVDF



PVDF

Clamp spigot

DN15-d20x1,9-d2=50,5 mm

DN20-d25x2,3-d2=50,5 mm

DN25-d32x2,9-d2=50,5 mm

DN32-d40x3,7-d2=50,5 mm

DN40-d50x4,6-d2=64,0 mm

DN50-d63x5,8-d2=77,5 mm


DN65-d75x6,8-d2=91,0 mm

PE EL
ATEX-VERSION



Further versions on request.

PE 100 / PVC U / PVC C / PP / PVDF

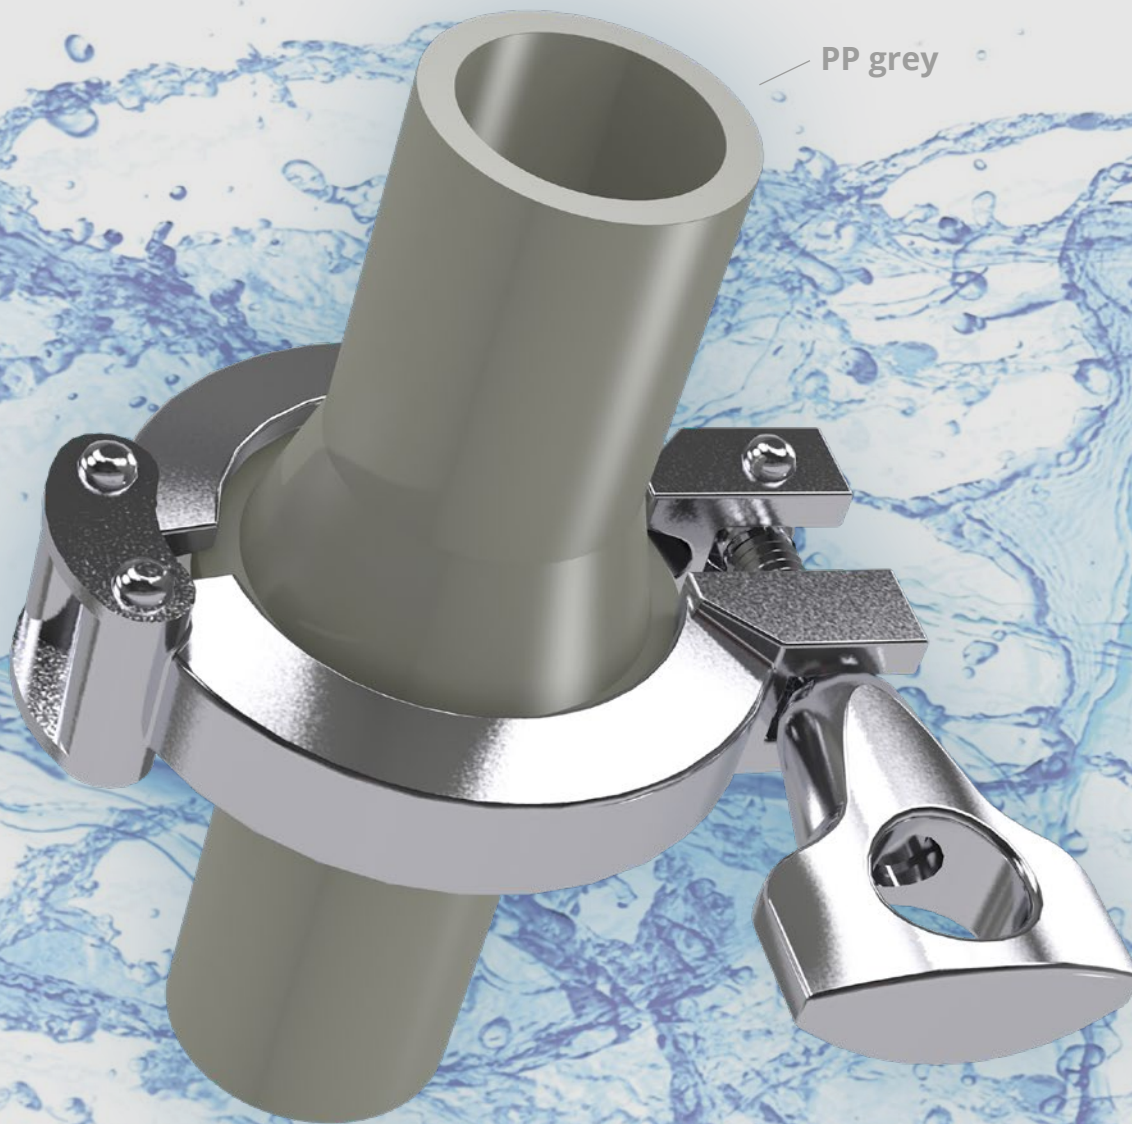

PP grey


ClampCon® SYSTEM



Manufactured in all common materials CNC and injection molding – from DN15 to DN65.

THE PERFECT FIT AND FITTING FOR EVERY APPLICATION

OUR **ClampCon**[®] SYSTEM – tool-free connection for any installation. You will find the complete product line listing on our website.

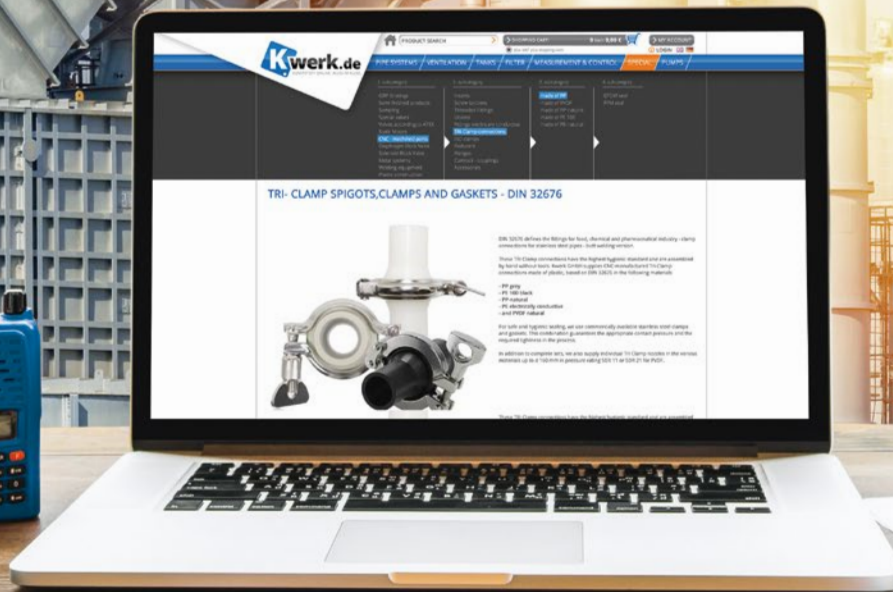

EN 04_2023